

Kill Switch Wiring

Kohler Engines Baja Team



Disconnect the two wires from the switch at the Carburetor



Pull wires from the carburetor to the back of the engine carefully

Connect the two wires to the two required Normally open Kill Switches and wire them in parallel






With this modification, the Red lever will not shutdown engine via spark but it will turn off fuel flow to the carburetor.

Removal of Oil Sentry system

Oil Sentry™ (if equipped)

This switch is designed to prevent engine from starting in a low oil or no oil condition. Oil Sentry™ may not shut down a running engine before damage occurs. In some applications this switch may activate a warning signal. Read your equipment manuals for more information.

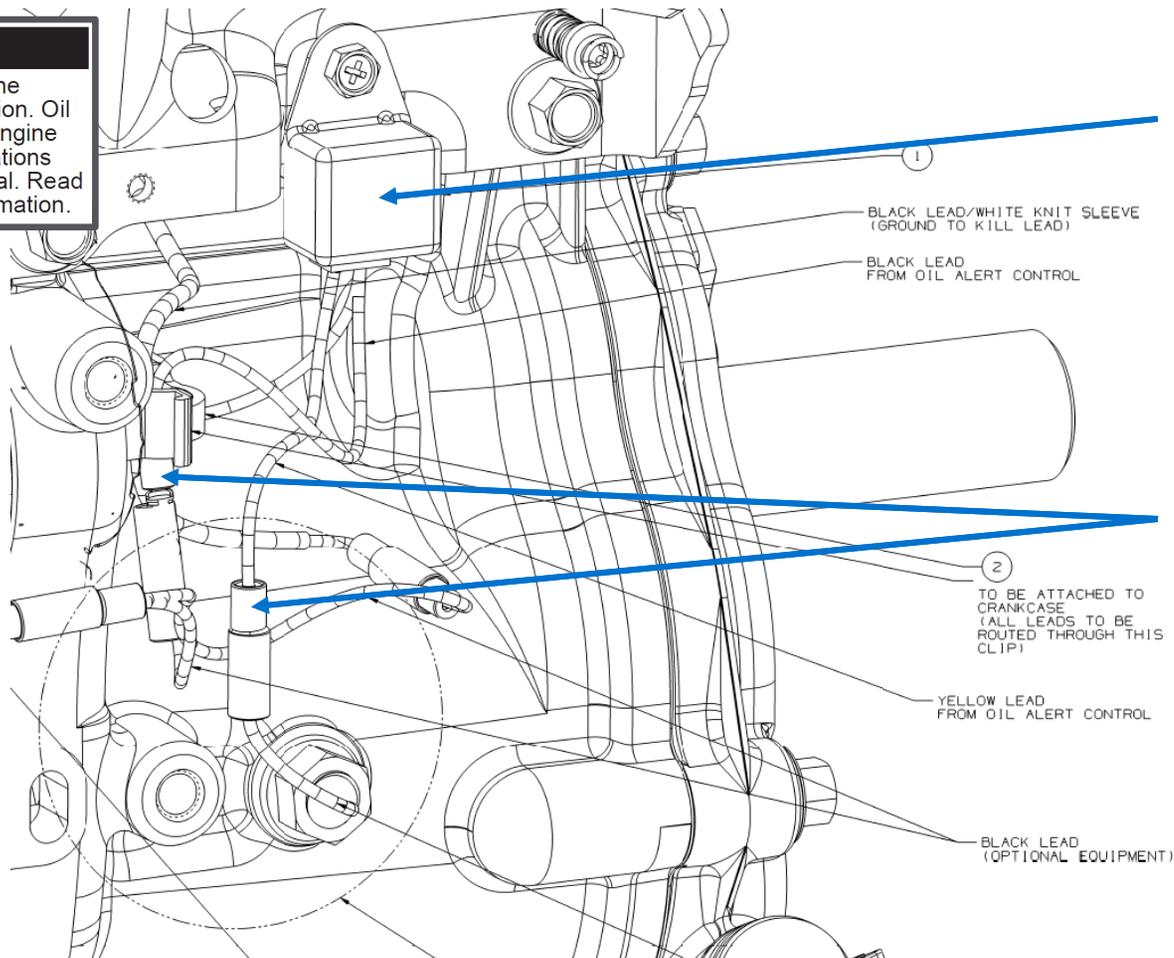

Remove Wiring and control module from the engine

Disconnect

Due to the terrain Baja SAE cars operate the Kohler team witnessed un-necessary ignition cuts during certain maneuvers due to the protection of the Oil Sentry System.

This system is to be disabled for Baja SAE.